


Abmessungen der FRÖMAG Standard-Nutwerkzeuge Zoll-Abmessungen

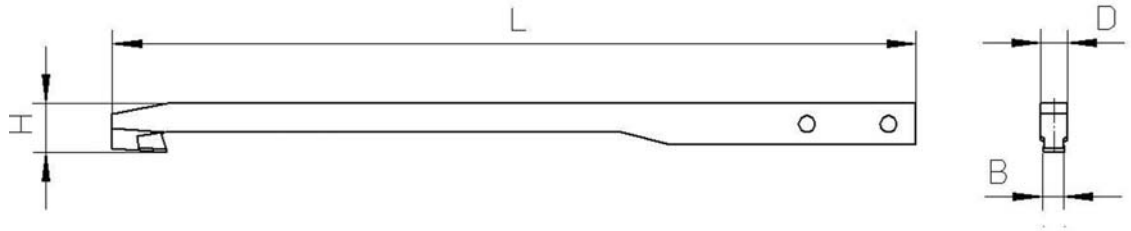

Typ	Ausrüstung	Bohrungsbereich zoll	Breite B		Dicke D	Höhe H	Länge L
			zoll	mm			
AA50	WA5		1/8	3,17	5	5,5	265
AA51		33/64 - 9/16	3/16	4,76		6,2	
AA52						5,8	
AA53		9/16 - 5/8				6,6	
AA54		5/8 - 3/4				7,4	
AA55		3/4 - 51/64				8,7	
AA61	WA6	51/64 - 7/8	3/16	4,76	10	9,5	335
AA61-250	WA6/250					435	
AA62	WA6	7/8 - 1	1,4	6,35		12,4	335
AA62-250	WA6/250					435	
AA63	WA6	1 - 1 1/4	5/16	7,93		13	335
AA63-250	WA6/250					435	
AA64	WA6	1 1/4 - 1 3/8	3/8	9,52		13,7	335
AA64-250	WA6/250					435	
AA65	WA6	1 1/4 - 1 3/8	3/8	9,52		17	335
AA65-250	WA6/250					435	
AA66	WA6	1 3/8 - 1 1/2	3/8	9,52		16,7	335
AA66-250	WA6/250					435	
AA67	WA6	1 3/8 - 1 1/2	3/8	9,52		17,8	335
AA67-250	WA6/250					435	
AA68	WA6	1 1/2 - 1 9/16	7/16	11,11		19,5	335
AA68-250	WA6/250					435	
AA69	WA6	1 9/16 - 1 3/4	7/16	11,11		21	335
AA69-250	WA6/250					435	
AA6910	WA6	1 1/2 - 1 37/64	7/16	11,11		20	335
AA6910-250	WA6/250					435	
AA6911	WA6	1 1/2 - 1 3/4	1/2	12,7		19,5	335
AA6911-250	WA6/250					435	